



iMac Intel 21.5" EMC 2544 CPU Replacement

Prereq only for removing the heat sink.

Written By: Walter Galan



INTRODUCTION

Prereq only for removing the heat sink.



TOOLS:

- [Spudger](#) (1)
-


Step 1 — CPU



i The CPU will most likely be stuck to the heat sink with thermal compound.

- Insert the flat edge of a spudger between the CPU and heat sink.
- Gently pry the CPU off the heat sink by slightly twisting the spudger upwards.

Step 2

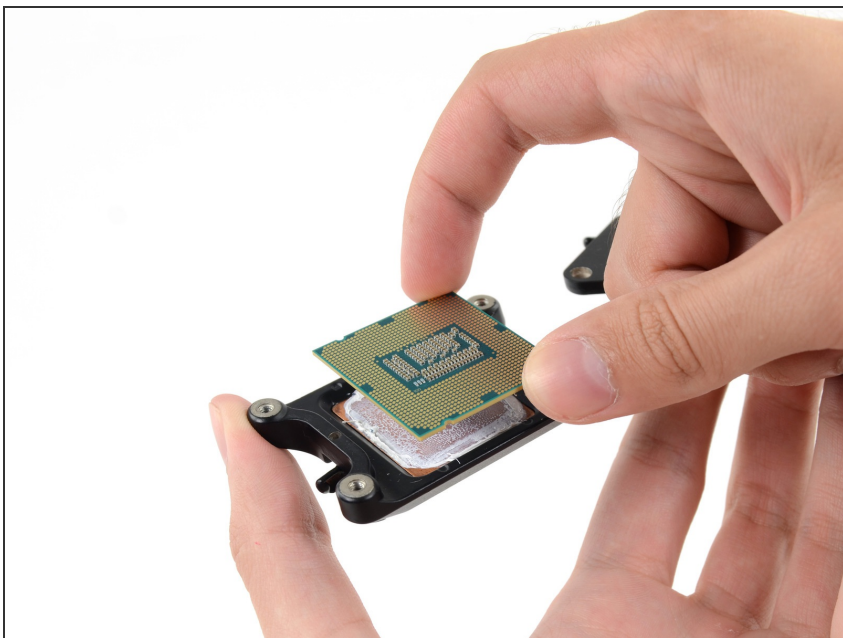

- Remove the CPU from the heat sink. Be careful not to touch the contacts.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 07:30:30 PM.